
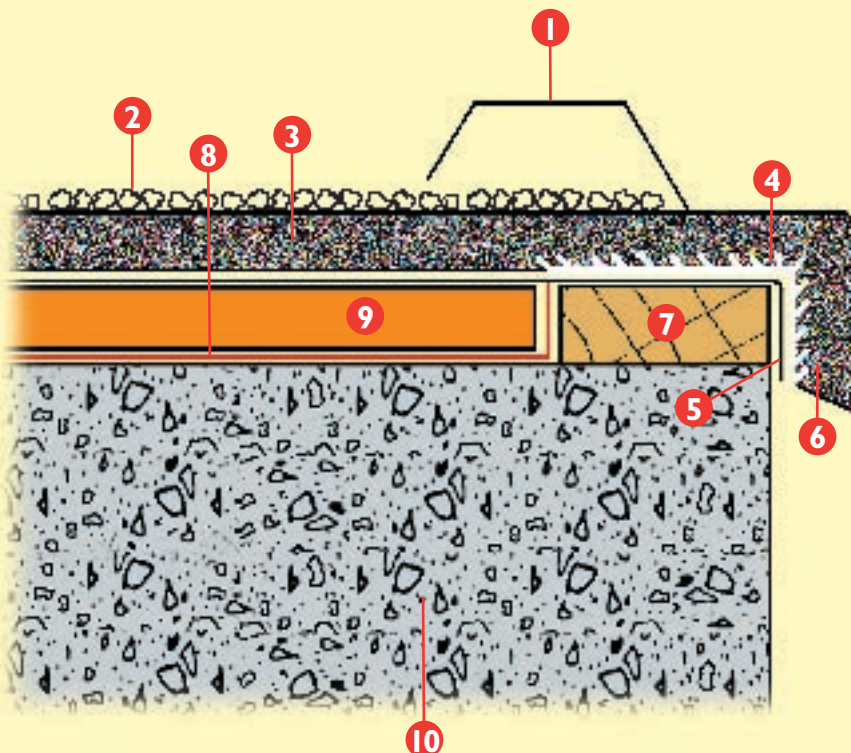


- 1) BRICKWORK
- 2) FELT OR SIMILAR DAMP-PROOF COURSE
- 3) FLASHING FIXED WITH TRADITIONAL PLUMBERS' DETAIL INCLUDING TIMBER FILLET
- 4) EXPANDED METAL LATHING

- 5) SEPARATING MEMBRANE
- 6) MIN. 150MM HIGH 20MM THREE-COAT MASTIC ASPHALT SKIRTING WITH ANGLE FILLET
- 7) FREE STANDING TIMBER KERB
- 8) 20MM TWO-COAT MASTIC ASPHALT
- 9) ROOFING TILES
- 10) UNDERFELT

- 11) EXPANDED METAL LATHING
- 12) TIMBER FILLET
- 13) PLYWOOD BOARDING OR SIMILAR
- 14) 20MM THREE-COAT MASTIC ASPHALT

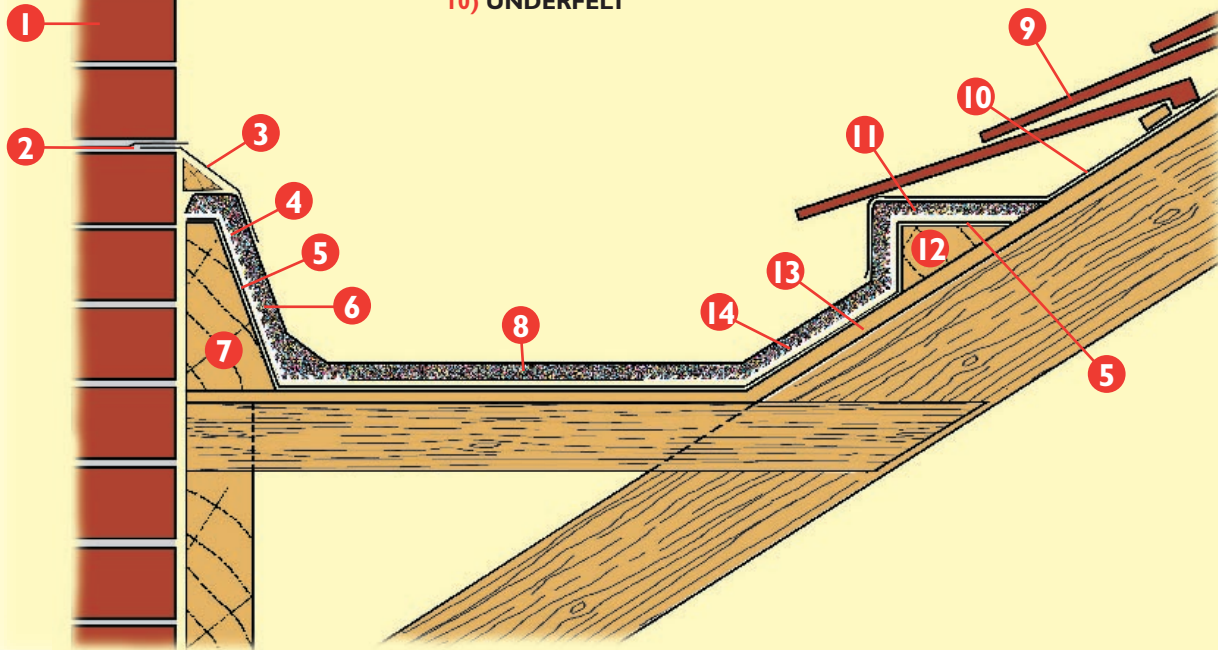

- 1) OPTIONAL SOLID MASTIC ASPHALT WATER CHECK
- 2) SOLAR REFLECTIVE TREATMENT
- 3) 20MM TWO COAT MASTIC ASPHALT
- 4) EXPANDED METAL LATHING
- 5) SEPARATING MEMBRANE
- 6) 20MM THREE COAT MASTIC ASPHALT APRON AND UNDERCUT DRIP
- 7) TIMBER STOP
- 8) VAPOUR CONTROL LAYER
- 9) SUITABLE BOARD TYPE THERMAL INSULANT
- 10) CONCRETE ROOF DECK TO FALLS